



ELECTRICAL DATA

Frequency range A	MHz	60 ÷ 80
Bandwidth	MHz	20
Gain max .	dBi	7.4
Return loss	dB	≥ -14
VSWR		≤ 1.5:1
Nominal impedance	Ω	50
Polarization	Ω	V/H
H beamwidth 60 Mhz	-3 dB	110°
H beamwidth 70 Mhz	-3 dB	140°
H beamwidth 80 Mhz	-3 dB	120°
E beamwidth 60 Mhz	-3 dB	60°
E beamwidth 70 Mhz	-3 dB	60°
E beamwidth 80 Mhz	-3 dB	60°
Max Power	W	200 W
Connector		Nf
Lightning protection	All metal parts are D.C. grounded	

MECHANICAL DATA

Dimension length	mm	2520X1700x130
Weight without clamp	kg	5
Elements number		5
Wind surface	m ²	Front 0.03 side 0.11
Front wind load	Kg	0.81 (25 m/s)
Side wind load	Kg	3.38 (25 m/s)
Mounting +/- 90°	mm	standard polarizer Ø 30

MATERIALS


Anticorodal aluminium - Brass - Teflon
- Polyvinyl chloride - RoHS compliance

ACCESSORIES


SUPIS01	Isolation fiberglass pole Ø 35 x 1000
BAG6080	Transport bag

ORDERING AND PACKAGING INFORMATIONS


ARL60F80XZ	With unscrewed elements
ARL60R80XZ	With folding elements
PACKAGING mm.	1850x200x200 / weight 3.8 Kg without clamps

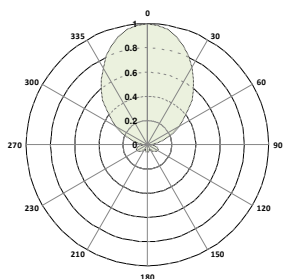


60 Mhz E plane




60 Mhz H plane




70 Mhz E plane





70 Mhz H plane



80 Mhz E plane



80 Mhz H plane

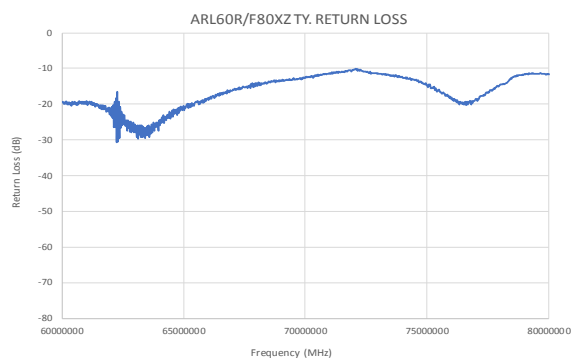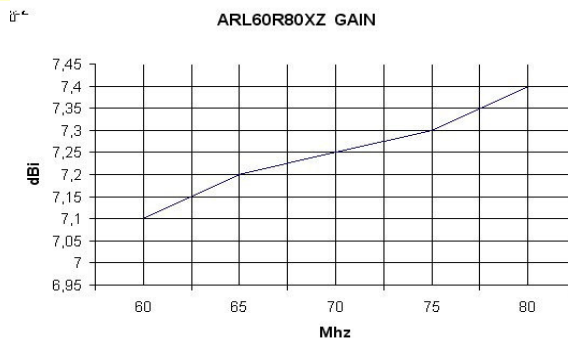

In relazione alle normative in materia di responsabilità sui prodotti, segnaliamo che nel caso di utilizzo delle nostre antenne in condizioni operative particolari, quali ad esempio forti sollecitazioni dinamiche dovute a vento, vibrazioni o deformazioni delle strutture di sostegno, si possono verificare rotture del prodotto stesso e/o la caduta a terra. L'installatore che deve essere altamente qualificato, deve conoscere le normative nazionali di sicurezza in vigore, deve seguire le informazioni contenute nelle nostre istruzioni, deve verificare sempre l'adeguatezza del prodotto stesso alle condizioni operative del sito di installazione e deve controllare l'installazione operando la manutenzione periodica dell'impianto. --- In relation to the laws concerning product liability, we notify you that in case you use our antennas in severe operative conditions such as, for example, strong wind, vibrations or distortions of the support structure, the product can break and/or fall down. The person who install the product must be skilled, must know the national security law in force, must follow the product instructions, must check that the product is compatible with the installation site and must control the installation with periodical maintenance.